

Frequency:

Frequency range: 50ohm: 0~4GHz
 75ohm: 0~1GHz

VSWR: 1.5 Max. under 4GHz (50 ohm)
 1.5 Max. under 1GHz (75 ohm)


Insertion Loss (dB): 0.177 under 4GHz (50 ohm)
 0.177 under 1GHz (75 ohm)

PN index
0

Type	Dimensions							
	A	B	C	D	a	b	c	d
F0	1.0	10.2	1.27	1.7	1.3	10.2	1.6	2.1

Electrical:

Impedance : 50/75 ohm
 Voltage Rating : ≥ 500 V rms (depending on cable)
 Insulator Resistance : ≥ 5 G Ω
 Dielectric Withstanding Voltage : 1500 V rms .
 Contact Resistance : Center Contact ≤ 1.5 m Ω .
 Outer Contact ≤ 1 m Ω .

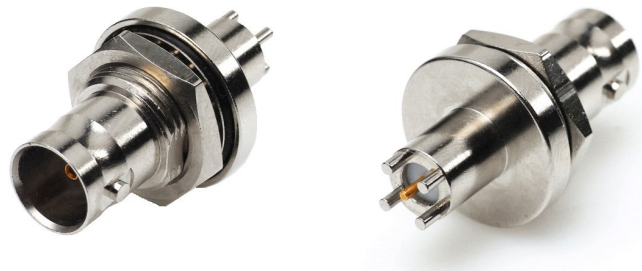

Mechanical:

Mating : Bayonet Coupling.
 Recommended Mating Torque : 0.6~2.5 lbs
 Coupling Nut Retention Force : ≥ 101.2 lbs

Environmental:

Temperature Range : -65°C to 165°C
 Corrosion (Salt Spray) : MIL-STD-202,
 Method 101,Cond. B
 Thermal Shock : MIL-STD-202,
 Method 107,Cond. B
 Mechanical : MIL-STD-202, Method 213, Cond. G
 Vibration : MIL-STD-202, Method 204, Cond. B

Notes:

- 1- The overall contour may be slightly changed per terminating with different cable and we reserve right to change it without notice.
- 2- Any changes for interface dimensions are strictly prohibited.
- 3- The Material and plating are in various options per customer's request.
- 4- A complete information for connectors is available upon request.

Tolerances .X ± 0.2 .XX ± 0.1 .XXX ± 0.05	Scale	Abbr.	Rev.	Part Number F102-329X PN index above	
	NTS	ST	B		
PAGE 1 of 1	All Dimensions in mm (Unless Otherwise Specified)			Date 2021/08/03	