



APPLICATIONS and Usage	Product FEATURES
<ul style="list-style-type: none"> • Test Equipment • Radar & Electronic Warfare • Communication systems 	<ul style="list-style-type: none"> • Image Frequency Interference Resistant • Image Suppression: 25dBc (type) • Field Removable SMA (F) Connector, Drop-In Type • Low LO Drive Power • Low Conversion Loss

ELECTRICAL SPECIFICATIONS @25°C:


Parameter	Min	Typical	Max	Units
INPUT PARAMETERS				
RF Frequency Range	1		2	GHz
RF input VSWR		2.5:1		Ratio
LO frequency Range	1		2	GHz
LO Power Range		10		dBm
LO VSWR		2.0		Ratio
TRANSFER CHARACTERISTICS				
Conversion Loss		6.5		dB
Single-sideband noise figure		6.5		dB
Image rejection		20		dBc
LO-to-RF isolation		20		dB
LO-to-IF isolation		20		dB
RF-to-IF isolation		20		dB
Input power at 1 dB compression		+6		dBm
Input two-tone third-order intercept point		15		dBm
OUTPUT PARAMETERS				
output IF frequency	20		40	MHz
output IF VSWR		1.5:1		Ratio

Note: This products integrate IF hybrid.

All Features is customizable Based on Customer Request

Part Number:

IIRM-001020



PAGE

1 of 2

Date

2021/09/11




ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Air bone		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Case type	52.4*43.4*12	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms


OUTLINE DRAWING (mm):

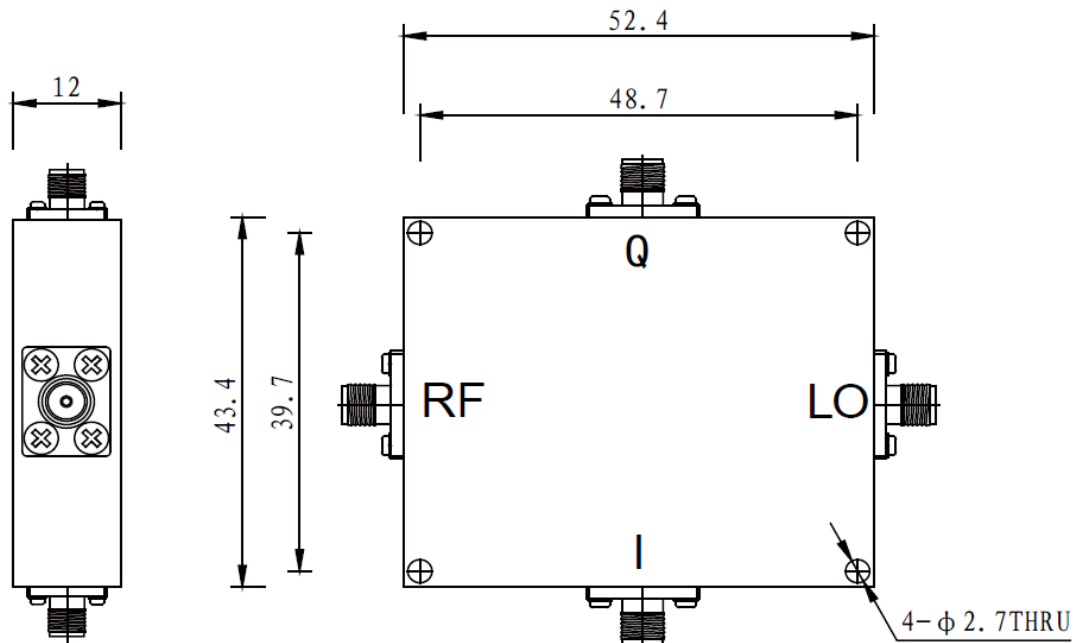

All Features is customizable Based on Customer Request

Part Number:

IIRM-001020



PAGE

2 of 2

Date

2021/09/11

