


## Frequency:

Frequency range: 0~3 GHz

VSWR: 1.3 Max

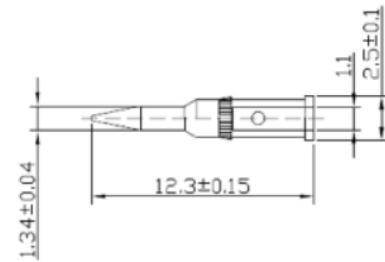

## Electrical:

Impedance : 75 ohm

Voltage Rating : 500 V rms.

Dielectric Withstanding Voltage : 1500 V rms .

Contact Resistance : Center Contact  $\leq 1.5 \text{ m}\Omega$ .

Outer Contact  $\leq 1 \text{ m}\Omega$  .




## Environmental:

Temperature Range : -55°C to +155°C

## Notes:

- 1- The overall contour may be slightly changed per terminating with different cable and we reserve right to change it without notice.
- 2- Any changes for interface dimensions are strictly prohibited.
- 3- The Material and plating are in various options per customer's request.
- 4- A complete information for connectors is available upon request.

<b>Tolerances</b> .X ±0.2 .XX ±0.1 .XXX ±0.05	Scale	Abbr.	Rev.	<b>Part Number</b> F101 - 112	
	NTS	ST	B		
PAGE <b>1 of 1</b>	All Dimensions in mm (Unless Otherwise Specified)			<b>Date</b> 2021/08/01	