
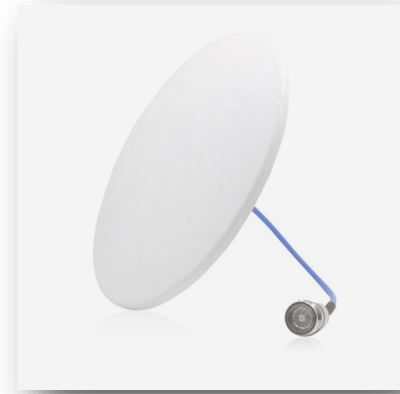


Features & Benefits

- multiple-in and multiple-out
- high gain dual polarity coverage for 2G, 3G, 4G, LTE
- Industrial grade directional antenna
- Easy for installing

Frequency Range	698-960 MHz	1710-2700 MHz
Gain	3/5dBi	
VSWR	≤1.5	
Polarization	Vertical	
Horizontal Beamwidth	360°	
Vertical Beamwidth	70°	
Lightning protection	DC Ground	
Input Impedance	50 Ω	
Max.Power	50 W	
Mechanical Specifications		
Connector	4.3-10 Female	
Dimensions	Ø190×100 mm	
Weight	0.45 kg	
Reflector Material	Aluminum	
Radome Material/color	ABS/white	
Operating Temperature	-40°C to +60 °C	
Mounting way	fastened with screw nuts	



Tolerances .X ±0.2 .XX ±0.1 .XXX ±0.05	Scale	Abbr.	Rev.	Part Number AT07020T	
	NTS	ST	B		
PAGE 1 of 1	All Dimensions in mm (Unless Otherwise Specified)			Date 2021/05/10	