



APPLICATIONS and Usage	Product FEATURES
<ul style="list-style-type: none"> • Test equipment • Radar & Warfare system • Communication system 	<ul style="list-style-type: none"> • Solid State, Mixture Integrated • High Speed, Low Loss, High Isolation Integral with Driver • Field Removable SMA (F) Connector • Operating Temperature:-55~+85°C • Control: TTL"0" Loss, TTL"1" Isolation

ELECTRICAL SPECIFICATIONS @25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	1		2	GHz
insertion Loss			1.6	dB
Isolation	40			dB
VSWR			1.8	Ratio
Switching Speed			1	us
Power Handling Average CW			25	Watt
DC Power Supply +5V		500		mA
DC Power Supply -12V		500		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+70	°C
Non-operating Temperature	-55		+85	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Air bone		

All Features is customizable Based on Customer Request	Part Number: SI411-01024M	
PAGE 1 of 2	Date 2021/09/11	

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions (L*W*H)	52*26*15	Max	Millimeter
Weight	100	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		Ohms

TTL CONTROL LOGIC:

- TTL 0 (low) (0 to 0.8 V) : Loss
- TTL 1 (high) (2.4 to 4.7 V) : Isolation


C1: "0", J0-J1 Signal Path;

C2: "0", J0-J2 Signal Path;

C3: "0", J0-J3 Signal Path;

C4: "0", J0-J4 Signal Path;


OUTLINE DRAWING (mm):

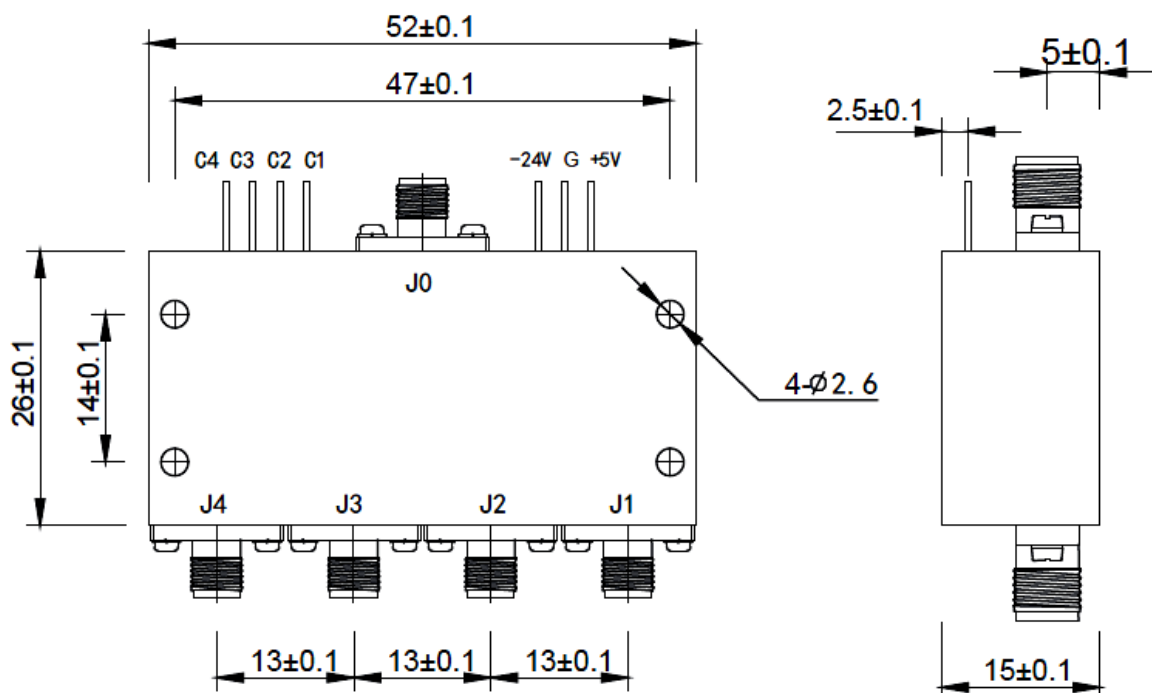

4W23

All Features is customizable Based on Customer Request

Part Number: **SI411-01024M**



PAGE

2 of 2

Date

2021/09/11

