

## Frequency:

Frequency range: 50ohm: 0~4GHz

75ohm: 0~1GHz

VSWR: 1.5 Max. under 4GHz (50 ohm)

1.5 Max. under 1GHz (75 ohm)

Insertion Loss (dB): 0.177 under 4GHz (50 ohm)

0.177 under 1GHz (75 ohm)

PN  
index

0

Cable Type	Dimensions			
	A	B	C	D
RG6(75Ω)	2.3	M2.3xP0.4	12.5	17.8

## Electrical:

Impedance : 50/75 ohm


Voltage Rating :  $\geq 500$  V rms (depending on cable)

Insulator Resistance :  $\geq 5$  GΩ

Dielectric Withstanding Voltage : 1500 V rms

Contact Resistance : Center Contact  $\leq 1.5$  mΩ

Outer Contact  $\leq 1$  mΩ

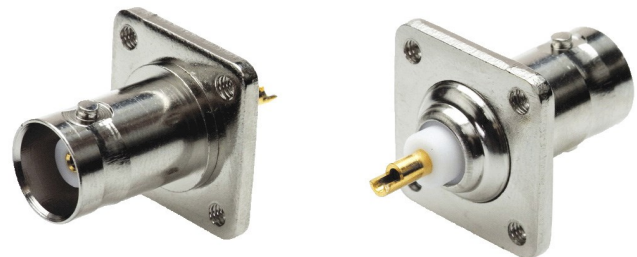

## Mechanical:

Mating : Bayonet Coupling

Recommended Mating Torque : 0.6~2.5 lbs

Coupling Nut Retention Force :  $\geq 101.2$  lbs

## Environmental:

Temperature Range : -65°C to 165°C

Corrosion (Salt Spray) : MIL-STD-202,

Method 101, Cond.B

Thermal Shock : MIL-STD-202, Method 107, Cond.B

Mechanical : MIL-STD-202, Method 213, Cond.G

Vibration : MIL-STD-202, Method 204, Cond.B

## Notes:

1- The overall contour may be slightly changed per terminating with different cable and we reserve right to change it without notice.

2- Any changes for interface dimensions are strictly prohibited.

3- The Material and plating are in various options per customer's request.

4- A complete information for connectors is available upon request.

Tolerances	Scale	Abbr.	Rev.	Part Number <b>F102-142X</b>	
.X ±0.2 .XX ±0.1 .XXX ±0.05	NTS	ST	B		
PAGE <b>1 of 1</b>	All Dimensions in mm (Unless Otherwise Specified)			Date 2021/08/01	